


## Tutorial questions (1<sup>st</sup> lesson)


Maleic anhydride may be prepared using two routes:

### Oxidation of benzene:

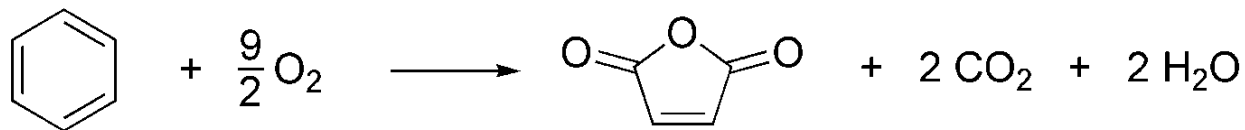

Catalyst:  $\text{V}_2\text{O}_5 + \text{MoO}_3$  on alumina, Typical chemical yield: 65%

Oxidation of but-1-ene:

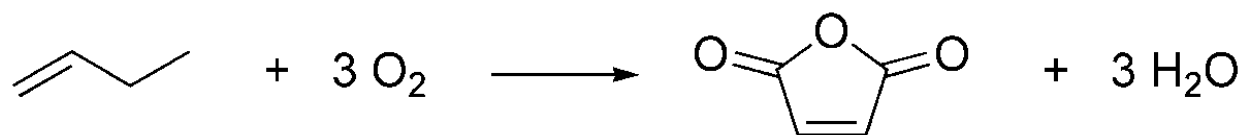

Catalyst:  $\text{V}_2\text{O}_5 + \text{P}_2\text{O}_5$  on alumina, Typical chemical yield: 55%

### Questions:

(a) Assuming that each reaction is performed in the gas phase only, and that no additional chemicals are required, calculate

(i) the atom economy

(ii) the effective mass yield of both reactions. You should assume that  $\text{O}_2$ ,  $\text{CO}_2$  and  $\text{H}_2\text{O}$  are not toxic.

(iii) E-factor. Consider that the by-products are completely oxidized to  $\text{CO}_2$  and consider  $\text{CO}_2$  being a waste. It means that in the oxidation of benzene 35% is converted solely to  $\text{CO}_2$  and in the oxidation of butane 45% .

(b) Which route would you recommend to industry? Outline the factors which might influence your decision.

**Basic terms:**

$$\text{Chemical Yield} = \frac{\text{mols (g) pdt obtained}}{\text{mols (g) pdt possible}} \times 100\%$$

$$\text{Atom Economy} = \frac{\text{MW}_{\text{desired pdt}}}{\sum \text{MW}_{\text{starting materials}}} \times 100\%$$

- How much of the reactants remain in the final product
- Does not account for solvents, reagents, reaction yield, and reactant molar excess

$$\text{Atom Efficiency} = (\% \text{ Yield})(\text{Atom Economy})$$

Effective mass yield:

$$\text{EMY} = \frac{\text{Product (Kg)}}{\text{Hazardous reagents (Kg)}} \times 100\%$$

- What is hazardous and what not? Depends on the person, who decides...
- Ignores stoichiometry

$$\text{E - Factor} = \frac{\text{Total Waste (Kg)}}{\text{Product (Kg)}}$$

- Typically split into organic and aqueous waste
- Smaller is better