

Primus-HD[®]Toric Primus-HD[®]Toric Yellow



**Preloaded System
Hydrophobic Acrylic Toric IOL**



Cylinder Power T1 to T6 (1.00 to 4.50 D at IOL Plane)

Toric aspheric 1-piece lens with hydrophobic acrylic material

Glistening free based on in vitro test¹

High stability (median rotation 2°)

100% of the implanted lenses had ≤ 4° rotation from end of surgery to 1, 3, 6 months – 1 year postoperatively

1-Step-Preloaded

Model Clear/Yellow	Cylinder Power at IOL Plane	Cylinder Power at Corneal Plane
AT1	1.00 D	0.72 D
AT2	1.50 D	1.07 D
AT3	2.25 D	1.59 D
AT4	3.00 D	2.11 D
AT5	4.00 D	2.80 D
AT6	4.50 D	3.15 D








Products for ophthalmic surgery

Primus-HD[®]Toric

Primus-HD[®]Toric Yellow

Preloaded System / Hydrophobic Acrylic Toric IOL

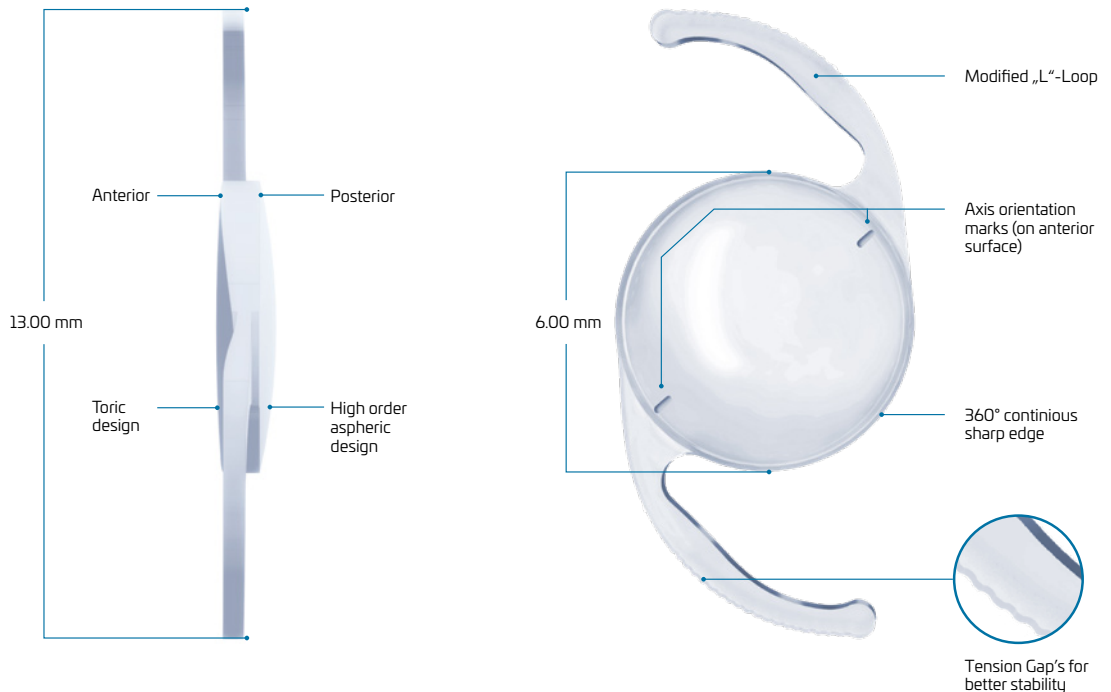

Technical Data

Model	Primus-HD[®]Toric Clear/Yellow AT1 – AT6
Optic Design	Posteriorconvex, Toric high order aspheric
Optic & Haptic Materials	Glistening free, hydrophobic Clear with UV-filter, Yellow with blue light filter
Haptic Design	Modified L, 1.5°
Dimension (Optic/OAL)	6.00 mm/13.00 mm
Power	+5.00 to +36.00 D (in 0.50 D increments)
Cylinder Power	1.00 to 4.50 D (T1 to T6)
Nominal	118.2
Haigis	$a_0 = 1.499$ $a_1 = 0.4$ $a_2 = 0.1$
HofferQ	pACD 5.688
Holladay	sf = 1.949
SRK/T	119.188
SRKII	119.588
Injector	Prosert [®] , 1-Step-Preload Injector

¹ data on file

Contact:

EyeNovation Surgical GmbH
 An der Brinkwiese 16
 45721 Haltern am See
 Tel.: +49 (0)2364 940 4111
 Fax: +49 (0)2364 940 4119
 info@eyenovationsurgical.de

EyeNOVATION[®]
 SURGICAL