


# EG-(SERIES)M60-D MONOCRYSTALLINE 60-CELL MODULE 315 ~ 335Wp

0~+3% POSITIVE TOLERANCE

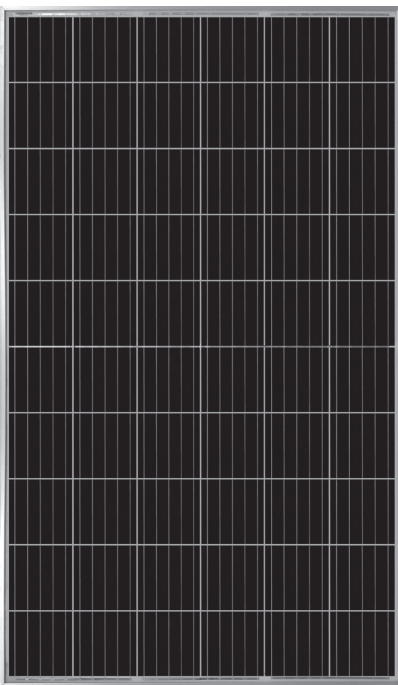

\* Black Frames Applied

## KEY FEATURES



### High Efficiency

Leading PERC technology achieves higher module efficiency up to 20.09%



### Excellent Low-light Performance

Advanced solar cell surface texturing technology allows for excellent performance in low-light environments



### High Reliability

Strict in-house testing in PV Lab which is CNAS approved & VDE certified



### Highly Strengthened Design

Certified to withstand: 5400Pa snow load and 2400Pa wind load



### PID Resistant

Excellent PID optimized, 1% less power degradation




· ISO9001:2015, ISO14001:2015, ISO45001:2018  
QC080000:2017, IEC TS 62941  
certified factory



· IEC61215, IEC61730, UL1703, IEC62804, IEC62716  
certified product

## LINEAR PERFORMANCE WARRANTY

10 Year Product Warranty · 25 Year Linear Power Warranty

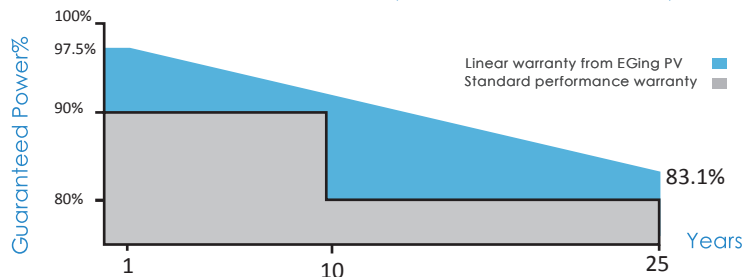

As a BloombergNEF Tier 1 and global leading manufacturer since 1998, EGing PV is committed to supplying reliable and durable PV products to customers to create together a greener planet.

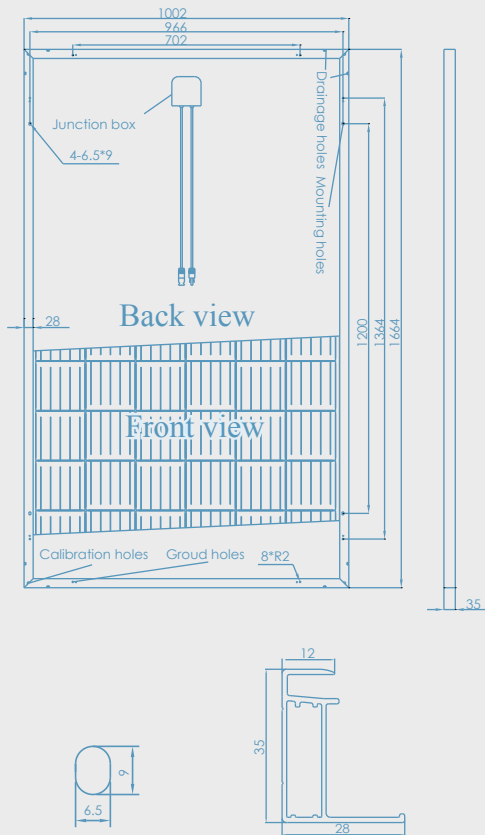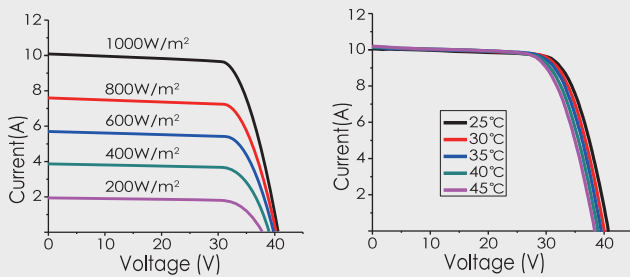**Engineering Drawings**

**I - V Curves**

**Packing Configuration**

Pieces per pallet	30
Size of packing (mm)	1700*1120*1150
Weight of packing (kg)	585
Pieces per container	840
Size of container	40' HC

**Electrical Characteristics**

STC	EG-315 M60-D	EG-320 M60-D	EG-325 M60-D	EG-330 M60-D	EG-335 M60-D
Pmax (W)	315	320	325	330	335
Vmp (V)	32.55	32.76	32.97	33.17	33.37
Imp (A)	9.68	9.77	9.86	9.95	10.04
Voc (V)	40.39	40.60	40.71	40.91	41.11
Isc (A)	10.14	10.23	10.32	10.41	10.50
Module efficiency (%)	18.89	19.19	19.49	19.79	20.09
Maximum system voltage (V)	1000				
Fuse Rating Current (A)	20				
Power tolerance (%)	0~+3				
Temperature coefficient	Pmax (%/°C)	-0.390			
	Isc (%/°C)	0.039			
	Voc (%/°C)	-0.295			

STC: Irradiance 1000W/m<sup>2</sup>, module temperature 25°C, AM=1.5

NOCT	EG-315 M60-D	EG-320 M60-D	EG-325 M60-D	EG-330 M60-D	EG-335 M60-D
Pmax (W)	233	237	241	245	249
Vmp (V)	29.88	30.12	30.36	30.59	30.98
Imp (A)	7.80	7.87	7.94	8.01	8.04
Voc (V)	37.07	37.32	37.48	37.73	38.17
Isc (A)	8.17	8.24	8.32	8.37	8.41
Power tolerance (%)	0~+3				

NOCT: Irradiance 800W/m<sup>2</sup>, ambient temperature 20°C, wind speed 1m/s

**Mechanical Characteristics**

Number of cells (pcs)	60
Size of cell (mm)	158.75*158.75
Type of cell	Mono
Thickness of glass(mm)	3.2
Type of frame	Anodized aluminum alloy
Junction box	IP68
Size of module (mm)	1664*1002*35
Weight (kg)	18
Cables/connectors	4mm <sup>2</sup> MC4 compatible
Length of Cabel(mm)	900

**Maximum Ratings**

Operating Temperature(°C)	-40~85
Operating Humidity(%)	5~85
Allowable Hail Load	25mm ice - ball with velocity of 23m/s