

Installation scenarios

Ultrasonic armatures

For industrial applications and R&D


Type 4 – freely suspended and clamped to the measuring sensor

Date: September 2023



4 - freely suspended and clamped to the measuring sensor

Application examples	Probe examples	Connection fittings
cleaning pH and O2 probes: <ul style="list-style-type: none"> • Wastewater treatment plants • Monitoring Stations 	<ul style="list-style-type: none"> • E&H Oxymax COS61D • E&H Memosens CPF81E • Hach LDO 2 sc • WTW TriOxmatic 	Clamping on the circumference of the probe. <u>Range of diameters:</u> 6 – 65mm other dimensions on request

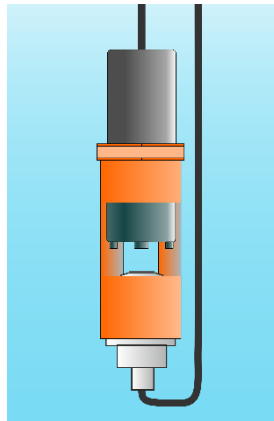

After consultation, special production request are always possible.



Disclaimer:

The information, text and illustrations in this document are for informational purposes only. We strive to provide accurate and up-to-date information, but the accuracy, completeness or timeliness of the content is not warranted. We reserve the rights to make changes to the content at any time.

Changes and Copyright:

All rights reserved. All trademarks and logos are the property of their respective owners.

Copying, reproducing or modifying any content of this document without express written permission is prohibited.

Further information:

Responsible for content and printing: usePAT GmbH, Austria

Copyright © 2023 usePAT GmbH, Vienna, Austria

usePAT GmbH

Schoenbrunner Strasse 231/2.01

1120 Vienna | Austria – Europe

Phone: +43 660 83 45 674

E-mail: info@usePAT.com

Web: www.usePAT.com

