


I'm not robot  reCAPTCHA

I am not robot!


John deere z225 belt routing

John deere z225 deck belt routing.

Service Transmission - 29 SERVICE TRANSMISSION MX37947 Picture Note: View from rear of machine. 2. Clean transaxle fan fins (A) and around exterior of each fan with a rag, brush, or compressed air. Checking and Replacing Transaxle Drive Belt (Z225) NOTE: The transmission drive belt is self-adjusted using a spring tensioner and does not require a tension adjustment. Checking Belt: 1. Park machine safely. (See Parking Safely in the SAFETY section.) MX37947 Picture Note: View from rear of machine. MX38116 2. Inspect drive belt (A) for excessive wear, damage or stretching while in position on the engine sheave, transmission sheaves, and drive belt tensioner sheave. Page 2 Checking and Replacing Pump Drive Belt (Z425 and Z445) NOTE: The transmission drive belt is self-adjusted using a spring tensioner and does not require a tension adjustment. Checking Belt: 1. Park machine safely. (See Parking Safely in the SAFETY section.) MX37946 Picture Note: View from rear of machine. MX38117 2. Inspect belt (A) for excessive wear, damage or stretching while in position on the transmission sheave and drive belt tensioner sheave. Replacing Belt: 1. Disconnect electric clutch wiring connector (B) from main wiring harness connector (C). 2. Remove clutch wiring harness from retaining clip (D), and lower harness end through hole (E). 3. Remove mower deck drive belt (F). (See Replacing Mower Deck Drive Belt in the SERVICE MOWER section.) 4. Remove drive belt (A) from drive sheaves and idler sheave. • To make removal and installation of the belt easier, carefully rotate the spring loaded idler (G) clockwise (H), and remove belt. 5. Install drive belt onto drive sheaves and idler sheave as shown. 6. Install mower deck drive belt. 7. Install electric clutch wiring harness back through frame hole and connect to main wiring harness. Secure harness onto frame with retaining clip. Service Mower Removing and Installing Mower Deck Foot Plate Removing Foot Plate 1. Park machine safely. (See Parking Safely in the SAFETY section.) MX37794 2. Remove bolts (A) and nuts. 3. Rotate foot plate up using finger pull (B). 4. Remove foot plate. Installing Foot Plate 1. Place tabs (C) of foot plate into slots in frame. 2. Lower foot plate. 3. Install bolts (A) and nuts. Removing Mower (42 Inch Mower) 1. Park machine safely. (See Parking Safely in the SAFETY section.) c CAUTION: Avoid injury! Entanglement in a belt or sheave can cause serious injury. Stop engine and wait for all moving parts to stop. c CAUTION: Avoid injury! Always operate the mower with the foot plate installed. Operating with the foot plate removed can cause serious injury. C B A This manual is related to the following products: Whether you're a long time owner or just starting out, you'll find everything you need to safely optimize, maintain and upgrade your machine here. Shop Z225 Parts Online You've got your John Deere equipment - now it's time to keep it running for the long haul.




Checking Belt: 1. Park machine safely. (See Parking Safely in the SAFETY section.) MX37947 Picture Note: View from rear of machine. MX38116 2. Inspect drive belt (A) for excessive wear, damage or stretching while in position on the engine sheave, transmission sheaves, and drive belt tensioner sheave. Page 2 Checking and Replacing Pump Drive Belt (Z425 and Z445) NOTE: The transmission drive belt is self-adjusted using a spring tensioner and does not require a tension adjustment. Checking Belt: 1. Park machine safely. (See Parking Safely in the SAFETY section.) MX37946 Picture Note: View from rear of machine. MX38117 2. Inspect belt (A) for excessive wear, damage or stretching while in position on the transmission sheave and drive belt tensioner sheave. Replacing Belt: 1. Disconnect electric clutch wiring connector (B) from main wiring harness connector (C). 2. Remove clutch wiring harness from retaining clip (D), and lower harness end through hole (E). 3. Remove mower deck drive belt (F). (See Replacing Mower Deck Drive Belt in the SERVICE MOWER section.) 4. Remove drive belt (A) from drive sheaves and idler sheave. • To make removal and installation of the belt easier, carefully rotate the spring loaded idler (G) clockwise (H), and remove belt. 5. Install drive belt onto drive sheaves and idler sheave as shown. 6. Install mower deck drive belt. 7.

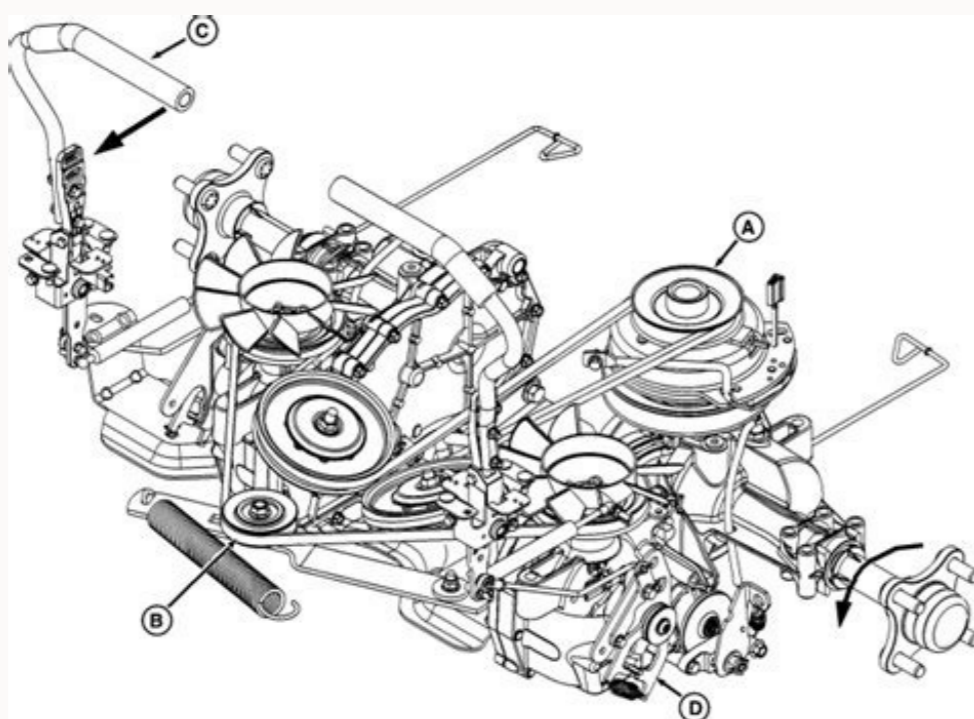


Checking Belt: 1. Park machine safely. (See Parking Safely in the SAFETY section.) MX37946 Picture Note: View from rear of machine. MX38117 2.



Park machine safely. (See Parking Safely in the SAFETY section.) MX37947 Picture Note: View from rear of machine. MX38116 2. Inspect drive belt (A) for excessive wear, damage or stretching while in position on the engine sheave, transmission sheaves, and drive belt tensioner sheave. Page 2 Checking and Replacing Pump Drive Belt (Z425 and Z445) NOTE: The transmission drive belt is self-adjusted using a spring tensioner and does not require a tension adjustment. Checking Belt: 1. Park machine safely. (See Parking Safely in the SAFETY section.) MX37946 Picture Note: View from rear of machine. MX38117 2. Inspect belt (A) for excessive wear, damage or stretching while in position on the transmission sheave and drive belt tensioner sheave. Replacing Belt: 1. Disconnect electric clutch wiring connector (B) from main wiring harness connector (C). 2. Remove clutch wiring harness from retaining clip (D), and lower harness end through hole (E). 3. Remove mower deck drive belt (F). (See Replacing Mower Deck Drive Belt in the SERVICE MOWER section.) 4. Remove drive belt (A) from drive sheaves and idler sheave. • To make removal and installation of the belt easier, carefully rotate the spring loaded idler (G) clockwise (H), and remove belt. 5. Install drive belt onto drive sheaves and idler sheave as shown. 6. Install mower deck drive belt. 7. Install electric clutch wiring harness back through frame hole and connect to main wiring harness. Secure harness onto frame with retaining clip. Service Mower Removing and Installing Mower Deck Foot Plate Removing Foot Plate 1. Park machine safely. (See Parking Safely in the SAFETY section.) MX37794 2. Remove bolts (A) and nuts. 3. Rotate foot plate up using finger pull (B). 4. Remove foot plate. Installing Foot Plate 1. Place tabs (C) of foot plate into slots in frame. 2. Lower foot plate. 3. Install bolts (A) and nuts. Removing Mower (42 Inch Mower) 1. Park machine safely. (See Parking Safely in the SAFETY section.) c CAUTION: Avoid injury! Entanglement in a belt or sheave can cause serious injury. Stop engine and wait for all moving parts to stop. c CAUTION: Avoid injury! Always operate the mower with the foot plate installed. Operating with the foot plate removed can cause serious injury. C B A This manual is related to the following products: Whether you're a long time owner or just starting out, you'll find everything you need to safely optimize, maintain and upgrade your machine here. Shop Z225 Parts Online You've got your John Deere equipment - now it's time to keep it running for the long haul.

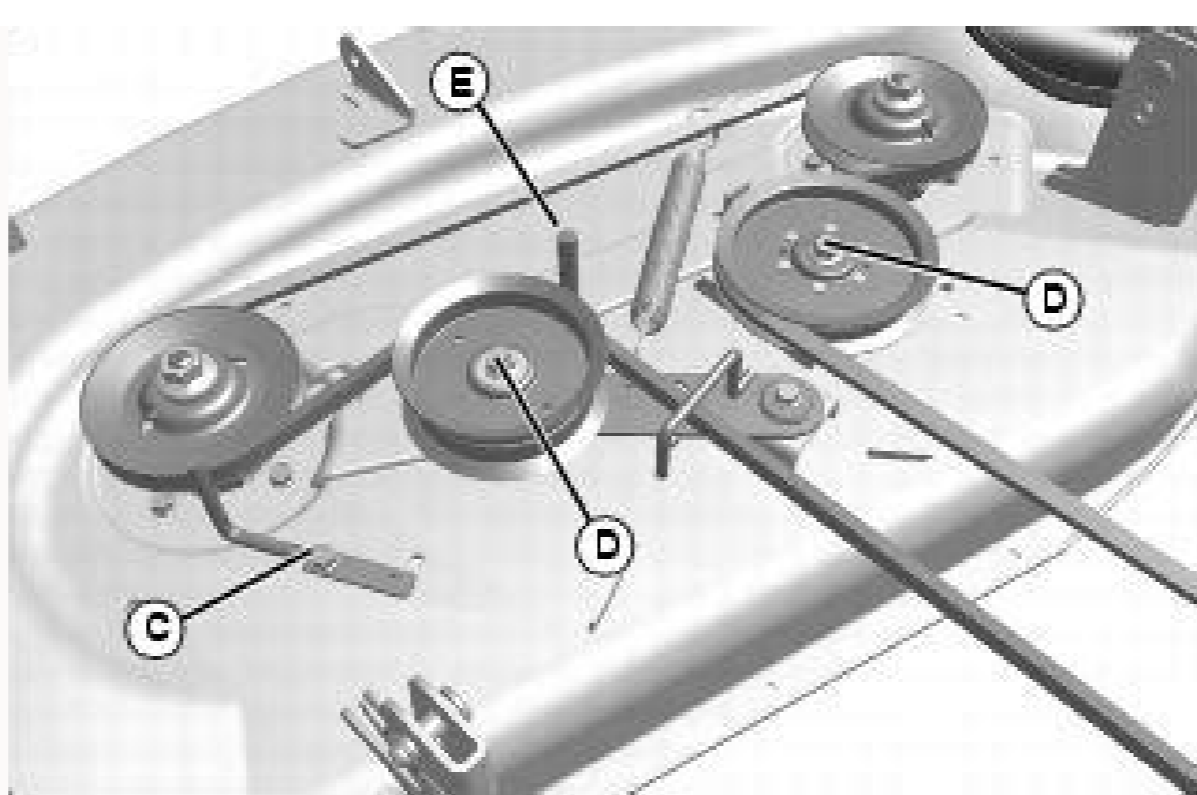

Park machine safely. (See Parking Safely in the SAFETY section.) MX37947 Picture Note: View from rear of machine.

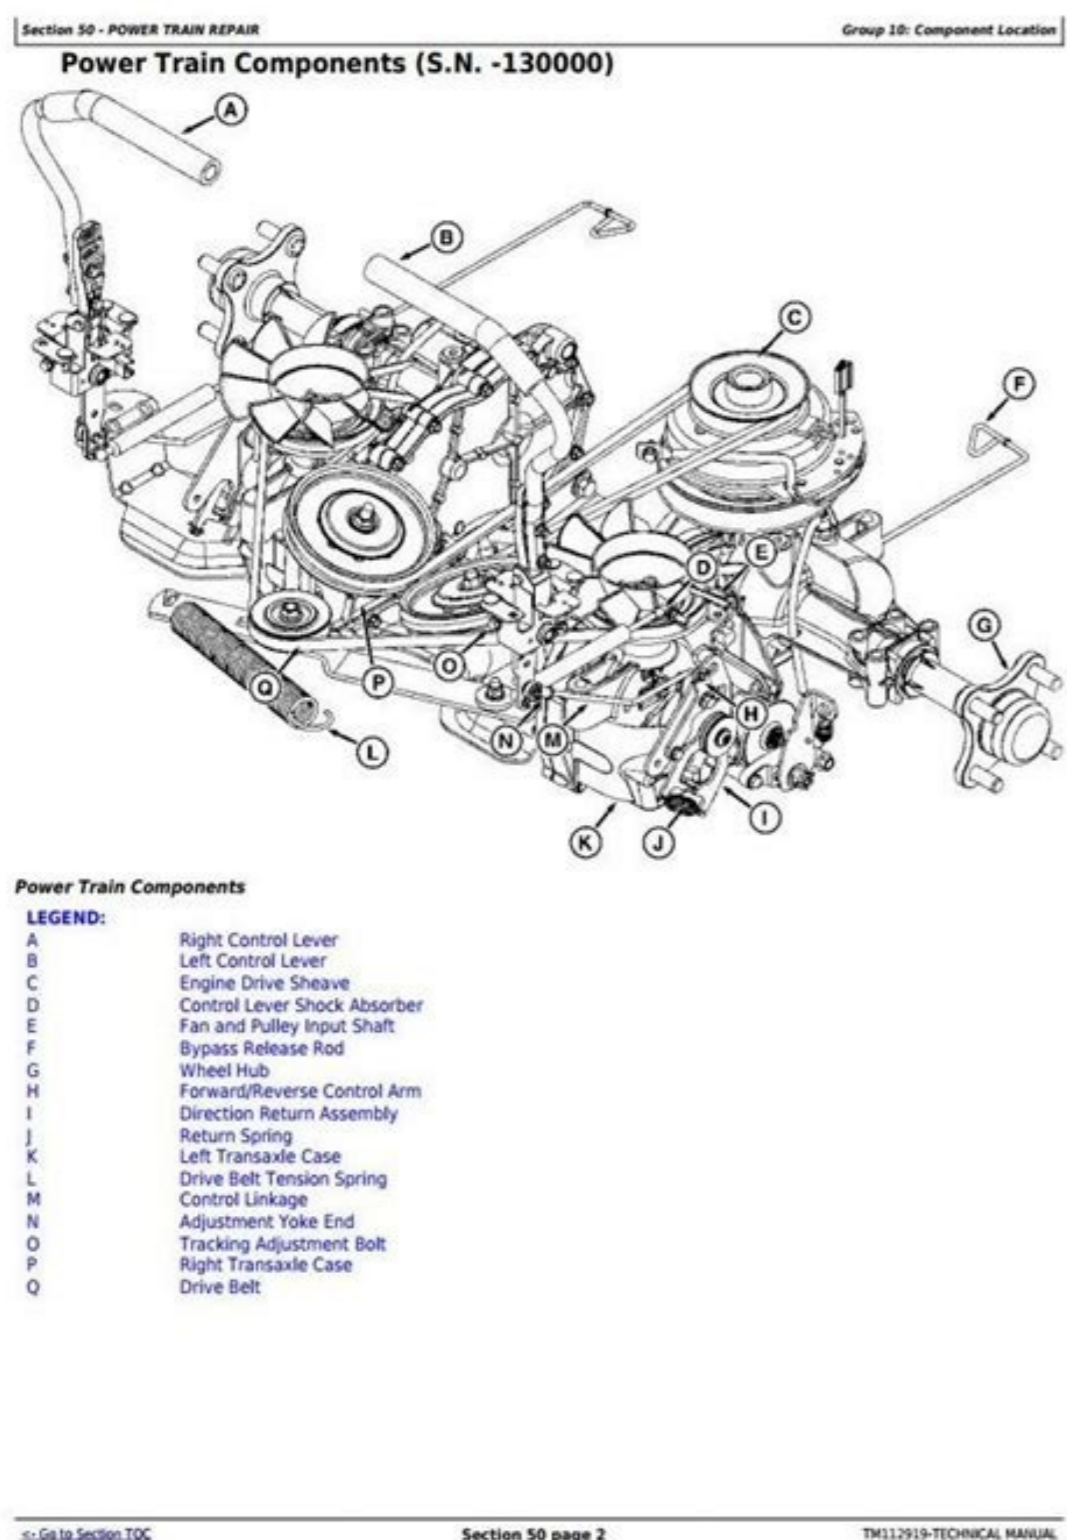

Checking and Replacing Transaxle Drive Belt (Z225) NOTE: The transmission drive belt is self-adjusted using a spring tensioner and does not require a tension adjustment. Checking Belt: 1. Park machine safely. (See Parking Safely in the SAFETY section.) MX37947 Picture Note: View from rear of machine. MX38116 2. Inspect drive belt (A) for excessive wear, damage or stretching while in position on the engine sheave, transmission sheaves, and drive belt tensioner sheave. Replacing Belt: 1. Disconnect electric clutch wiring connector (B) from main wiring harness connector (C). 2. Remove clutch wiring harness from retaining clip (D), and lower harness end through hole (E). 3. Remove mower deck drive belt (F). (See Replacing Mower Deck Drive Belt in the SERVICE MOWER section.) 4. Remove drive belt (A) from drive sheaves and idler sheave. • To make removal and installation of the belt easier, carefully rotate the spring loaded idler (G) clockwise (H), and remove belt. 5. Install drive belt onto drive sheaves and idler sheave as shown. 6. Install mower deck drive belt (F). 7. Install electric clutch wiring harness back through frame hole and connect to main wiring harness. Secure harness onto frame with retaining clip. Service Mower Removing and Installing Mower Deck Foot Plate Removing Foot Plate 1. Park machine safely. (See Parking Safely in the SAFETY section.) MX37794 2. Remove bolts (A) and nuts. 3. Rotate foot plate up using finger pull (B). 4. Remove foot plate. Installing Foot Plate 1. Place tabs (C) of foot plate into slots in frame. 2. Lower foot plate.

3. Install bolts (A) and nuts. Removing Mower (42 Inch Mower) 1. Park machine safely. (See Parking Safely in the SAFETY section.) c CAUTION: Avoid injury! Entanglement in a belt or sheave can cause serious injury. Stop engine and wait for all moving parts to stop. A G H F C B D E c CAUTION: Avoid injury! Components are installed under spring tension. Wear eye protection and use proper tools when installing and removing components with spring tension. c CAUTION: Avoid injury! Always operate the mower with the foot plate installed. Operating with the foot plate removed can cause serious injury. C B A This manual is related to the following products: Whether you're a long time owner or just starting out, you'll find everything you need to safely optimize, maintain and upgrade your machine here.

Shop Z225 Parts Online You've got your John Deere equipment - now it's time to keep it running for the long haul. Understand your investment protection by reviewing the John Deere warranty. Understand your Warranty Terms Explore our collection of helpful information from some of the best horticultural minds around. All focused on how to make your yard beautiful. Look, dig in and enjoy. See Back Yard Tips Safety and How-To You can take simple steps to keep everyone safe around equipment. Watch now to learn about safely using your equipment. Shop.Deere.com has parts for all makes & models of John Deere equipment. Choose speedy delivery or pick-up options at your local dealer. Shop Parts Online Today! This model may be registered under the manufacturer's OEM warranty. Please see warranty statement and contact your dealer before repairing. Z225 Traction Drive

| | | | | | | |
|---|---|---|--|--------------------------|--|--|
| 48" Deck | Z225, Z235, Z245, Z245, Z255 Traction Belt (SN -130000) | 42" Deck | Z445, Z465 Traction Drive | 48" Deck | Z245 Traction Drive | 54" Deck |
| 42" Convertible Deck (SN -130000) | Z425, Z445, Z465 Traction Belt (SN -130000) | 42" Convertible Deck (SN 130001-) | Traction Belt (SN 130001-) | 48" TD Deck (SN -130000) | 48" Deck | 48" TD Deck (SN 130001-) |
| 62" Deck | Z645, Z655, Z665 Traction Drive (SN 130001-) | Deck Belt | 48" High Capacity Deck | 54" High Capacity Deck | Deck Belt | 60" High Capacity Deck |
| 010001-020000) | 717, 727 Drive Belt | 737, 757 Drive Belt (HydroGear Pump -30000) | Drive Belt (Kanzaki Pump 30001-) | 717A, 727A Drive Belt | Deck Belt | 777, 797 Drive Belt (SN |
| - Deck Belt | Drive Belt (SN 020001-) | 60" Deck | 48" Deck | 54" Deck | 60" Deck | Z510A, Z520A Traction Drive |
| Z810A, Z820A, Z830A, Z840A, Z850A, Z860A Drive Belt | Z710A, Z720A Traction Drive | Deck Belt | Z910A, Z920A, Z925A, Z930A, Z950A, Z960A, Z970A Drive Belt | 48" Deck | 997 *This machine is shaft driven therefore the isn't a drive belt. 60" Rear Discharge | Deck 60" Side Discharge Deck 72" Deck See less See more 45 |