

Mono Perc


DHM-60L9(BW)

Half-Cell High Efficiency PV Module


Quality Guarantee

12-year Material & technology warranty

25-year Linear power output warranty

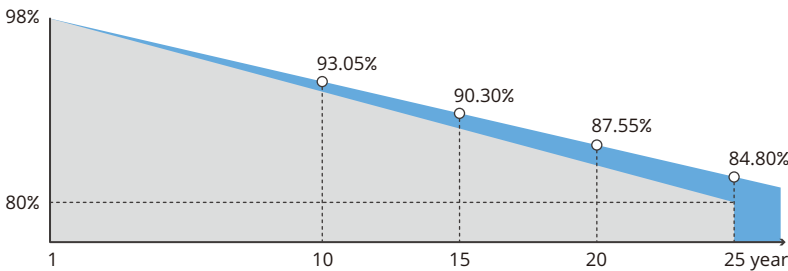

DAH solar linear power output guarantee
Standard linear power output guarantee

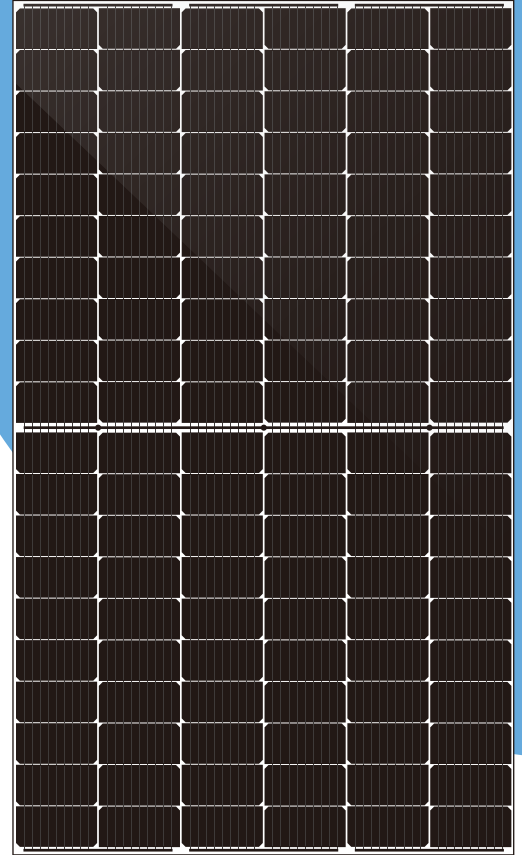

370~380 W

Max
Module
Efficiency

20.86%



Optimal Process Design

166mm+9BB+Half-cut, higher power output



Select Grade A Crystalline Silicon Solar Cells

Grade A crystalline silicon solar cells make high-power output with cost-effective



Stable Generation Performance

Guaranteed 0~+5W positive tolerance and slower power attenuation: first year ≤2%, 0.55% per year from 2-25



Process Upgraded

Lower risk of hot spot and stronger anti-PID ability



Higher Power Gains and Lower Losses

Excellent low irradiance performance and low shadow loss



Strong Environmental Adaptability and Great Durability

Certified by Dust-Sand, Salt-Mist, Ammonia etc. weather resistance tests and enhanced mechanical load: wind load (2400 Pa) and snow load (5400 Pa)

Comprehensive Products and System Certificates



IEC 61215 / IEC 61730 / CE / INMETRO

ISO 9001-

2015/Quality management system

ISO 14001-


2015/Standards for environmental management system

ISO 45001-

2018/International standards for occupational health & safety

DHM-60L9(BW) 370~380W

Design

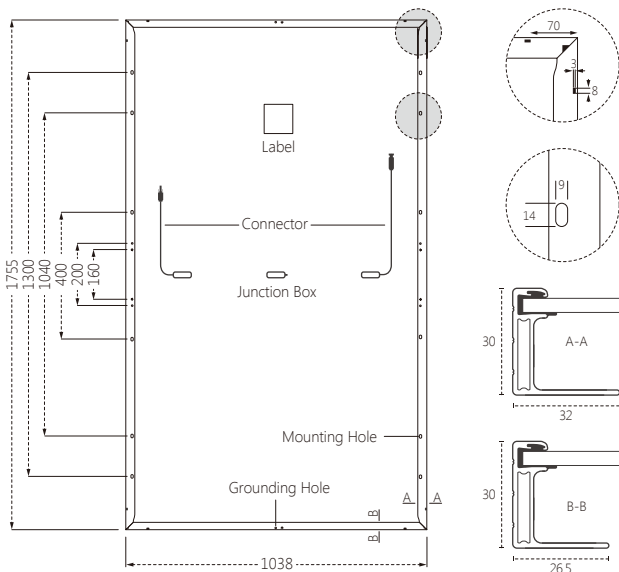

Mechanical Specification

Cells Type
Mono 166×83mm

Weight
20kg

Cable
(Including connector)

No. of Cells

Glass

Junction box

Connector

Dimension (L×W×T)
1755×1038×30mm

Packing
36pcs/pallet, 936pcs/40HQ

4.0mm², Portrait: 300mm(+)/400mm(-)

Landscape: 1400mm(+)/1400mm(-)

120 (6×20)

3.2mm High Transmission, Antireflection Coating

IP68, 3 Bypass Diodes

MC4 Compatible

Operating Parameters

Maximum system voltage	1500V DC
Operating Temperature	-40 ~ +85°C
Maximum series fuse rating	20A
Snow load, frontside	5400Pa
Wind load, backside	2400Pa
Nominal operating cell temperature	45°C±2°C
Application level	Class A

STC-Electrical Characteristics

Module Type	DHM-60L9(BW)		
Maximum Power (P _{max})	370W	375W	380W
Open-circuit Voltage (V _{oc})	41.0V	41.2V	41.4V
Maximum Power Voltage (V _{mp})	34.2V	34.4V	34.6V
Short-circuit Current (I _{sc})	11.36A	11.42A	11.48A
Maximum Power Current (I _{mp})	10.82A	10.90A	10.98A
Module Efficiency (%)	20.31%	20.59%	20.86%
Temperature Coefficient of I _{sc}		0.05%/°C	
Temperature Coefficient of V _{oc}		-0.31%/°C	
Temperature Coefficient of P _{max}		-0.35%/°C	

Standard Test Environment : Irradiance 1000W/m², Cell temperature 25°C, Spectrum AM1.5

NOCT-Electrical Characteristics

Maximum Power (P _{max})	278W	282W	286W
Open-circuit Voltage (V _{oc})	38.8V	39.0V	39.2V
Maximum Power Voltage (V _{mp})	32.4V	32.6V	32.7V
Short-circuit Current (I _{sc})	9.17A	9.22A	9.26A
Maximum Power Current (I _{mp})	8.59A	8.66A	8.72A

Standard Test Environment : Irradiance 800W/m², Ambient temperature 20°C, Spectrum AM1.5, Wind speed 1m/s

I-V Curve DHM-60L9(BW)-370W

