


Beyond Series

Jiangsu Runda PV Co.,Ltd.

415W MBB Monocrystalline Module Half-cell Module S7-132 395~415W

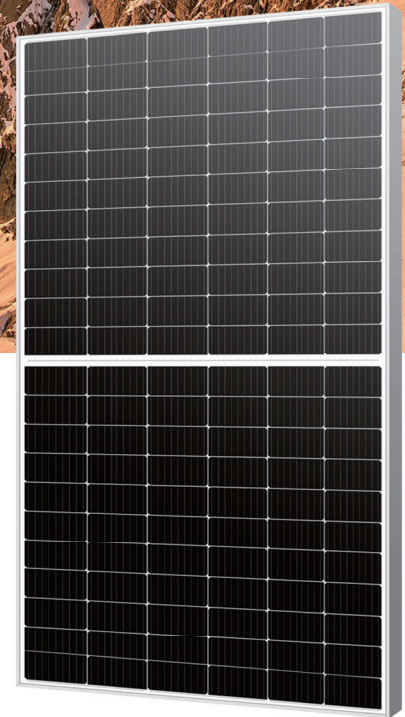

- ▲ Higher output power
- ▲ Module efficiency up to 20.8%
- ▲ Lower temperature coefficient



- ▲ Lower LCOE (Levelized Cost Of Energy)
- ▲ High Power output lead to lower BOS cost



- ▲ ISO9001:2015 Quality Management system
- ▲ ISO14001:2015 Environmental Management System
- ▲ ISO45001:2018 Occupational Health and Safety Management System



- ▲ Salt Mist Corrosion Protect
- ▲ Ammonia Resistance




Excellent Potential Induced Degradation Resistance



Excellent Wind Load 2400Pa&Snow Load 5400Pa Under Certain Installation Method

Runda's linear performance warranty

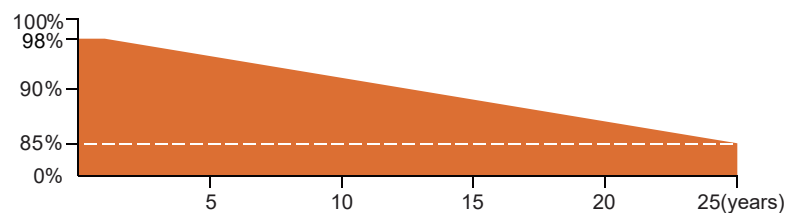

12 Years
Material&Craft
Quality
assurance

25 Years
85% output
Power
guarantee

Tel: +86-0510-83801000 Fax: +86-0510-83802000
 Web: www.rundapv.com E-mail: sales@rundapv.com
 Add: Yanxiang Road 108, Ehu Town, Xishan District, Wuxi City, Jiangsu Province, P.R.China

Beyonder Series

RS395~415S7-132

Electrical Characteristics(STC*)

Power Output(Wp)	395	400	405	410	415
Max Power Tolerance(W)	0-5	0-5	0-5	0-5	0-5
Module Efficiency(%)	19.8	20.0	20.3	20.5	20.8
Voltage Mpp-Vmpp(V)	37.37	37.52	37.74	37.93	38.07
Current Mpp-Impp(A)	10.57	10.66	10.73	10.81	10.90
Voltage Open Circuit-Voc(V)	44.65	44.85	45.06	45.28	45.46
Short Circuit Current-Isc(A)	11.50	11.59	11.66	11.74	11.83

*STC:Irradiance 1000 W/m²,Environment Temperature 25°C,Air Mass AM1.5

Electrical Characteristics(NMOT*)


Power Output(Wp)	303.45	307.29	311.13	314.98	318.82
Voltage Mpp-Vmpp(V)	34.06	34.20	34.40	34.57	34.70
Current Mpp-Impp(A)	8.91	8.98	9.04	9.11	9.19
Voltage Open Circuit-Voc(V)	41.22	41.41	41.60	41.81	41.97
Short Circuit Current-Isc(A)	9.78	9.85	9.91	9.98	10.06

*NMOT:Irradiance 800 W/m²,Environment Temperature 20°C,Air Mass AM1.5


Mechanical Data

Dimension Of Module	1924*1038*35mm
Weight	22.5kg
Glass	High transmission glass 3.2mm
Cables	4mm ² /300mm or Customized Length
Junction Box	IP68,3 Bypass-Diode
Connector	MC4 compatible


Module Structure Drawing

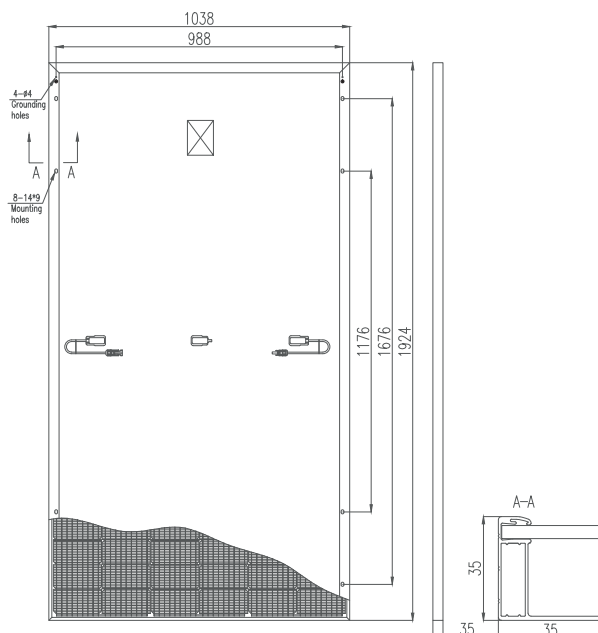

I-V Curves(410W)

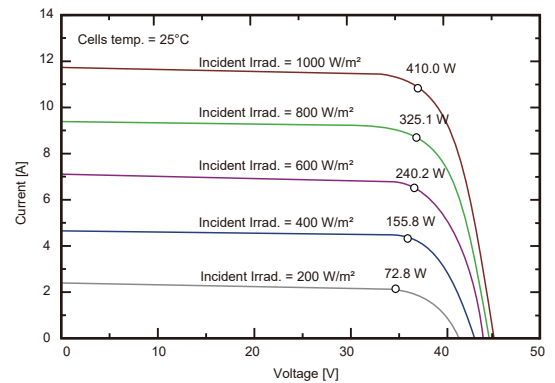

P-V Curves(410W)

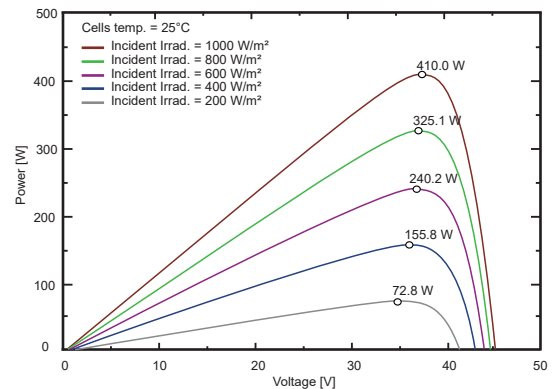

Packaging Configuration

Container	40'HQ
Pieces Per Pallet	31
Pallets Per Container	24
Pieces Per Container	744

Working Conditions

Max System Voltage(VDC)	1500V
Max Series Fuse Rating	20A
Maximum Load Capacity	Snow 5400Pa/Wind 2400Pa
Operating Temperature	-40~+85
Safety Class	II

Temperature Ratings

Temperature Coefficients of Isc(%/°C)	0.046
Temperature Coefficients of Voc(%/°C)	-0.266
Temperature Coefficients of Pmpp(%/°C)	-0.354
NMOT	45±2°C