

Installation scenarios

Ultrasonic armatures

For industrial applications and R&D


Typ 3 – 90° installation in pipe

Date: September 2023




3 - 90° installation in pipe

Application examples	Probe examples	Connection fittings
<ul style="list-style-type: none"> • cleaning and keeping the optics clean • UV/Vis Spectroscopy • NIR Spectroscopy 	<ul style="list-style-type: none"> • UV/Vis and NIR probes • Hellma probes • Bruker NIR probes 	<ul style="list-style-type: none"> • Thread flange DIN2566 • Ingold DN25 • Ingold DN40 • Varivent Type N or F • Triclamp

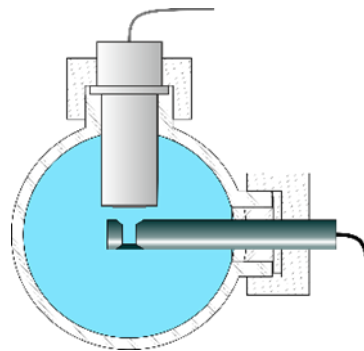

Angled installation is only usable for cleaning applications!

Symbolic drawing of all installation situations which differs according to the connection fitting.

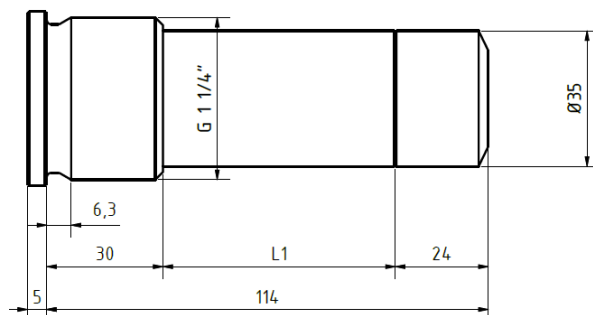

Rohrgewinde nach DIN ISO 228-1
Pipe thread according to DIN ISO 228-1

The length L1 can be selected before ordering regardless of the fitting type.

Special designs are also possible upon request at any time.

Disclaimer:

The information, text and illustrations in this document are for informational purposes only. We strive to provide accurate and up-to-date information, but the accuracy, completeness or timeliness of the content is not warranted. We reserve the rights to make changes to the content at any time.

Changes and Copyright:

All rights reserved. All trademarks and logos are the property of their respective owners.

Copying, reproducing or modifying any content of this document without express written permission is prohibited.

Further information:

Responsible for content and printing: usePAT GmbH, Austria
Copyright © 2023 usePAT GmbH, Vienna, Austria

usePAT GmbH
Schoenbrunner Straße 231/2.01
1120 Vienna / Austria – Europe
Phone: +43 660 83 45 674
E-Mail: info@usePAT.com
Web: www.usePAT.com

